

# 0514 SERIES








1.27x2.54mm(0.05"x0.1"), Female Header, Dual Row, 8.5mm Height

## Specifications

Current Rating: 1Ampere  
 Insulation Resistance: 500MΩ Min.  
 Dielectric Withstanding: 300V AC  
 Contact Resistance: 20mΩ Max.  
 Operating Temperature: -40°C to +105°C

## Materials

Contact Material: Phosphor Bronze  
 Contact Plating: Gold/Tin over Nickel  
 Insulator: Glass Filled Polyester (UL 94V-0)

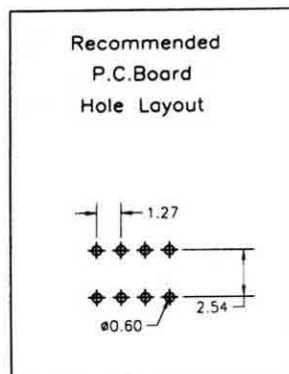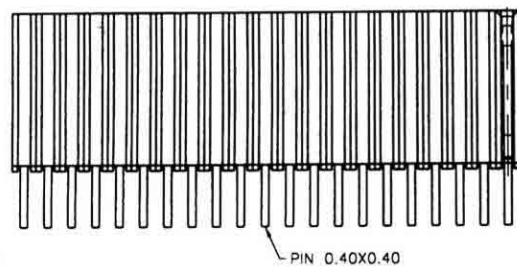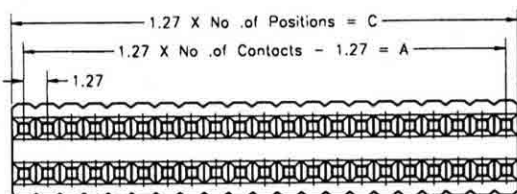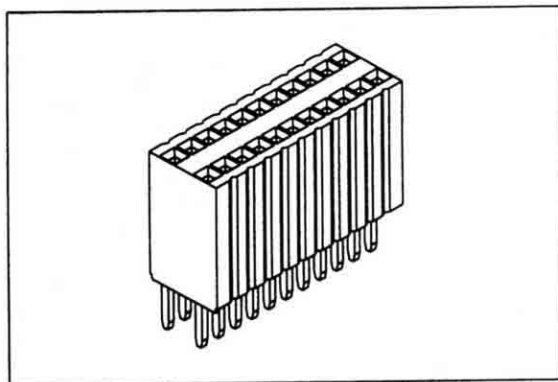

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	A	C		A	C		A	C		A	C
05	5.08	6.35	13	15.24	16.51	21	25.40	26.67	29	35.56	36.83
06	6.35	7.62	14	16.51	17.78	22	26.67	27.94	30	36.83	38.10
07	7.62	8.89	15	17.78	19.05	23	27.94	29.21	31	38.10	39.37
08	8.89	10.16	16	19.05	20.32	24	29.21	30.48	32	39.37	40.64
09	10.16	11.43	17	20.32	21.59	25	30.48	31.75	33	40.64	41.91
10	11.43	12.70	18	21.59	22.86	26	31.75	33.02	34	41.91	43.18
11	12.70	13.97	19	22.86	24.13	27	33.02	34.29	35	43.18	44.45
12	13.97	15.24	20	24.13	25.40	28	34.29	35.56			

## Ordering Information

0514 - X                      5 2 -                      X X 0

1: Tin  
 2: Gold

Position